



DRUCKVENTIL SAE 1 1/4" CD62

Part no.

PRESSURE VALVE SAE 1 1/4" CD62

siehe Tabelle unten /
see chart below

General Information:



Gewicht/ weight	3 kg
Einbaulage/ installation position	beliebig/ various
Betriebsdruck/ operating pressure (P)	min. 250 bar max. 420 bar
max.Druck/ max. pressure (T)	<20 bar
max. Volumenstrom/ max. recommended flow	80 l/min

Surface:

gal. beschichtet / electroplating coated

Hydraulic data:

Druckflüssigkeit/ Hydraulic medium	(HL, HLP) per ISO 6743-4 2015
Temperatur/ temperature range	-20 to +100 °C
Umgebungstemperatur/ environmental temperature	< +50 °C
Viskositätsbereich/ Viscosity range	2.8 - 500 mm ² /s
Verschmutzungsgrad/ degree of contamination	ISO 4406 18/16/13
Verschmutzungsgrad/ degree of contamination (prop. valves)	ISO 4406 17/15/12

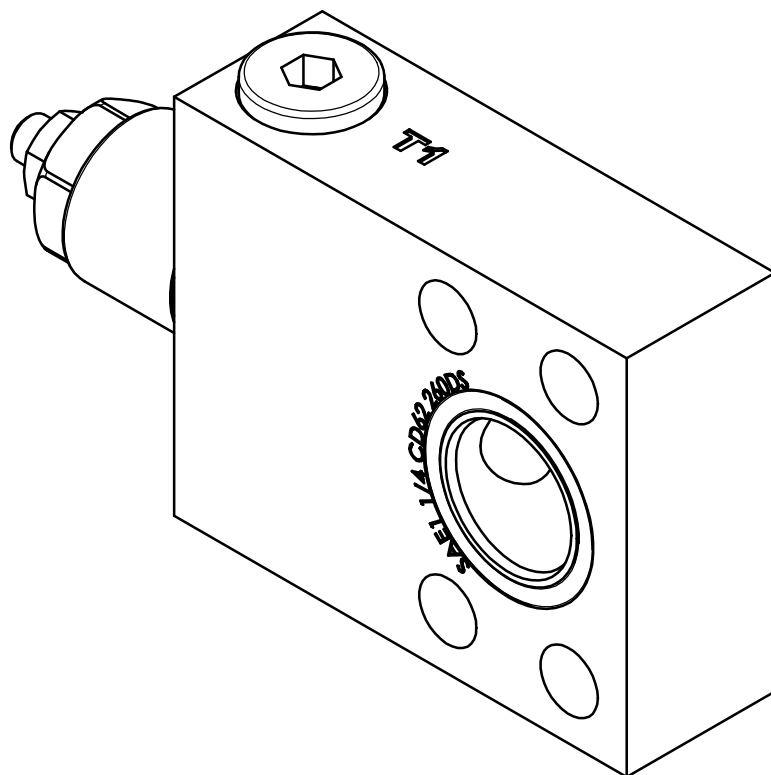

Ident-Nummer part number	Druckwert (bar) pressure value
416.001.404.9	420
4xx.xxx.xxx.9	NN
4xx.xxx.xxx.9	NN

Anschluss/ port	Anschlussgröße/ size	Norm	Anzugsmoment/ torque	Erläuterung/ annotation
P	SAE 1 1/4"	ISO 6162-2 (SAE J 518 Code62)	see specification	Versorgungsleitung/ supply port
T1	G1/2"	ISO 1179-1	see specification	tank
Reinke	prepared on	22.06.22	project no.	part no.
				416.001.404.9
				index 00
				page 1
				of 2

